

www.cooleasy.co.uk
0800 458 0101

cooleasy

Air Conditioning
Specialists

VERTU

SEEING IS BELIEVING



MIRROR
FINISH





WIFI
CONTROL



ENERGY
EFFICIENCY

Midea Vertu Plus

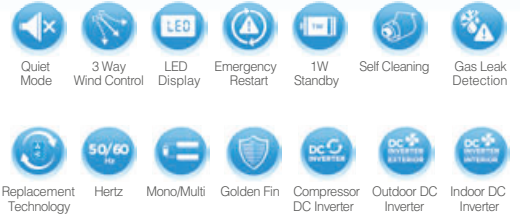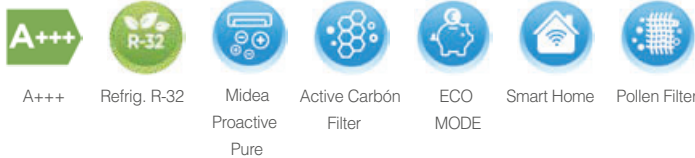

DUAL PURIFICATION SYSTEM

Double protection - dual filters remove dust and absorb harmful particles and bacteria, giving you cleaner, fresher air.

AUTOMATIC SELF CLEANING

The cooling fins are cleaned and dried automatically, keeping it functioning at its best and prolonging the life of the unit.

APP REMOTE CONTROL

Control the air conditioner and set timers easily through the app on your smartphone.

ONE TOUCH 'SUPER COOL' FUNCTION

This quick one-touch function flash cools the room for instant comfort – cold air within 60 seconds.

SWEET DREAMS

'Sweet Dreams' guarantees a good night's sleep by adjusting the air conditioner according to your body temperature. 'Do not Disturb' mode will switch off the LED display and provide a quiet sleep breeze.

Modelo Name		VERTU PLUS 09	VERTU PLUS 12
Indoor Model No.		MSVPBU-09HRFN8-QRD6GW-I	MSVPBU-12HRFN8-QRD6GW-I
Outdoor Model No.		MOX230-09HFN8-QRD6GW	MOX230-12HFN8-QRD6GW
Capacity	Nominal Cooling (min./max.)	kW 2.64 (1.03 / 3.22)	3.52 (1.38 / 4.31)
	Nominal Heating (min./max.)	kW 3.22 (0.82 / 3.37)	3.81 (1.07 / 4.38)
	Nominal Heating @ -7°C	kW PDTE	PDTE
Consumption	Nominal Cooling	W 1034	1034
	Nominal Heating	W 1027	1927
	Nominal Heating @ -7°C	W PDTE	PDTE
Energy Efficiency	SEER	8.6 - A+++	8.5 - A+++
	SCOP	4.6 - A++	4.6 - A++
Indoor Data	Air Volume L/M/H	m ³ /h 384 / 478 / 558	384 / 478 / 558
	Sound Level L/M/H	dB(A) 24 / 32 / 37.5	24 / 32 / 37.5
	Maximum Sound Power	dB(A) 51	51
	Dimensions	mm 897 / 312 / 182	897 / 312 / 182
	Net Weight	kg 10.5	10.5
Outdoor Data	Compressor Type	Rotary	Rotary
	Air Volume	m ³ /h 2150	2200
	Sound Level	dB(A) 54	54
	Sound Power	dB(A) 58	60
	Dimensions	mm 765 / 555 / 303	765 / 555 / 303
Interconnecting Cable	Net Weight	kg 26.7	26.7
	Power Supply	VPh/Hz 220-240/1/50	220-240/1/50
	Recc. Power Supply Cable	mm ² (2+T)x1,5	(2+T)x1,5
Refrigerant	Refrigerant	R-32	R-32
	Factory Charge	kg 0.62	0.62
	Pipe Sizes	pulg. 1/4" / 3/8"	1/4" / 3/8"
Operating Range	Maxim Distance / Height	m 25 / 10	25 / 10
	Min/Max Cooling Ambient.	°C -15°C / 50°C	-15°C / 50°C
	Min/Max Heating Ambient	°C -15°C / 30°C	-15°C / 30°C
	Min/Max Cooling Range	°C 17°C / 32°C	17°C / 32°C
	Min/Max Heating Range	°C 0°C / 30°C	0°C / 30°C

Cool easy