



# EVO Stainless Steel Patisserie Counters

## EVO60 / EVO90 / EVO120 / EVO150

**2** Years Parts & Labour Warranty

**2-3** Working Days Delivery


**UK** Service Support

**Manufactured** In Europe



This elegant Sterling Pro Green patisserie counter range (in Stainless Steel) is ideal for commercial environments such as cafés, conveniences stores and restaurants. Manufactured in Europe, this range features rear sliding doors for easy access, hinged front tempered glass for easy cleaning, LED lighting for each shelf, x3 refrigerated shelves, fan assisted cooling and an efficient refrigeration system that is enhanced by the superb air-flow around each of the product shelves.

Model	Deck Area	Temperature Range	Max Ambient	Refrigerant	Dimensions (mm)		
<b>EVO60-SS-R290A</b>	0.94m <sup>2</sup>	+3°C to +5°C	+25°C	R290a	W600	D785	H1400
<b>EVO90-SS-R290A</b>	1.41m <sup>2</sup>	+3°C to +5°C	+25°C	R290a	W900	D785	H1400
<b>EVO120-SS-R290A</b>	1.88m <sup>2</sup>	+3°C to +5°C	+25°C	R290a	W1200	D785	H1400
<b>EVO150-SS-R290A</b>	2.34m <sup>2</sup>	+3°C to +5°C	+25°C	R290a	W1500	D785	H1400
<b>EVO180-SS-R290A</b>	2.81m <sup>2</sup>	+3°C to +5°C	+25°C	R290a	W1800	D785	H1400

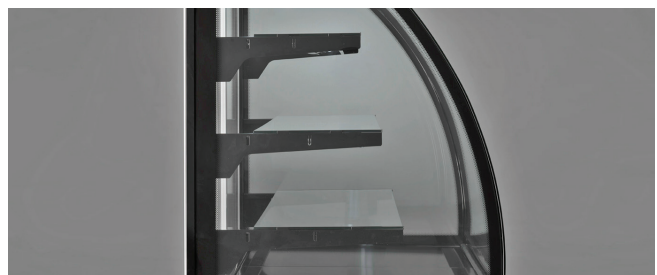

# EVO Stainless Steel Patisserie Counters

**EVO60 / EVO90 / EVO120 / EVO150**



## Range Specifications

	EVO60-SS-R290A	EVO90-SS-R290A	EVO120-SS-R290A	EVO150-SS-R290A	EVO180-SS-R290A
<b>GTIN Code</b>	5060750320785	5060750320204	5060750320198	5060750320778	5060750320976
<b>Dimensions (mm)</b>	W600 x D785 x H1400	W900 x D785 x H1400	W1200 x D785 x H1400	W1500 x D785 x H1400	W1800 x D785 x H1400
<b>Deck Area</b>	0.94m <sup>2</sup>	1.41m <sup>2</sup>	1.88m <sup>2</sup>	2.34m <sup>2</sup>	2.81m <sup>2</sup>
<b>Shelving Included</b>	3	3	3	3	3
<b>Front Opening</b>	Yes (For cleaning only)	Yes (For cleaning only)	Yes (For cleaning only)	Yes (For cleaning only)	Yes (For cleaning only)
<b>Glass Type</b>	Tempered	Tempered	Tempered	Tempered	Tempered
<b>Under-storage</b>	No	No	No	No	No
<b>Rear Sliding Doors</b>	Yes	Yes	Yes	Yes	Yes
<b>Exterior Finish</b>	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
<b>Temperature Range</b>	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C	+3°C to +5°C
<b>Max Ambient</b>	+25°C	+25°C	+25°C	+25°C	+25°C
<b>Refrigerant</b>	R290a	R290a	R290a	R290a	R290a
<b>Energy Rating</b>	N/A	N/A	N/A	N/A	N/A
<b>Climate Class</b>	3	3	3	3	3
<b>Energy Consumption</b>	N/A	N/A	N/A	N/A	N/A
<b>Power Supply</b>	13 amp plug	13 amp plug	13 amp plug	13 amp plug	13 amp plug
<b>Voltage</b>	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ	230/1N 50HZ
<b>Cooling System</b>	Fan assisted	Fan assisted	Fan assisted	Fan assisted	Fan assisted
<b>Defrost Type</b>	Electrical	Electrical	Electrical	Electrical	Electrical
<b>Upper Lighting</b>	Yes	Yes	Yes	Yes	Yes
<b>Shelf Lighting</b>	LED	LED	LED	LED	LED
<b>Digital Display</b>	Yes	Yes	Yes	Yes	Yes
<b>Lockable</b>	No	No	No	No	No
<b>Castors</b>	No	No	No	No	No
<b>Frost Free</b>	No	No	No	No	No